


Project		Catalog #		Type	
Prepared by		Notes		Date	

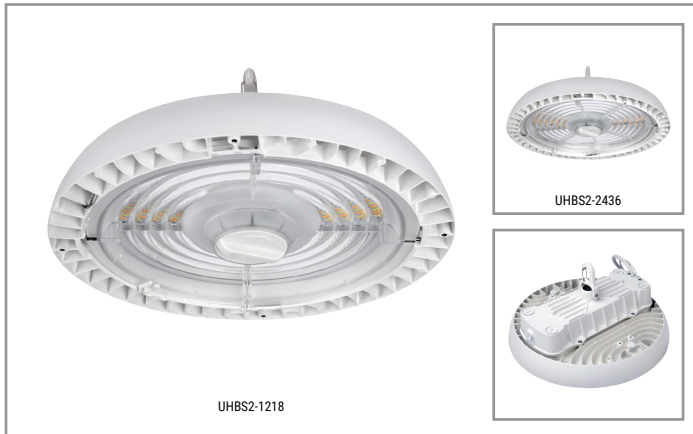

Metalux

UHBS2 Selectable High Bay

LED Round High Bay with Selectable CCT and Lumen

Typical Applications

Industrial • Commercial • Retail • Manufacturing • Warehouse • Gymnasium ⁽¹⁾
• Multi-purpose • Grocery • High Bay / Low Bay Applications

Note: (1) Rigid Stem mount not recommended for use in gymnasiums.

Interactive Menu

- Energy and Performance Data [page 2](#)
- Accessories [page 4](#)
- Photometric Data [page 5](#)
- Sensor Coverage [page 5](#)
- Product Warranty

Product Certification




Product Features



Top Product Features

- Selectable Lumen/Power performance packages
- 5 Color Selectable CCT - 3000/3500/4000/5000/6500K
- Field selectable distribution - Narrow, Medium, or Wide
- Sensor ready port for quick plug and play install
- Compact, 12" and 14" round die cast aluminum housing
- 120-347 Volt operating range with 6kV surge protection
- NEMA 4X, IP65 and NSF rated
- IP65 rated lens and driver enclosure
- 10ft power and dimming cords for easy installation

Dimensional and Mounting Details

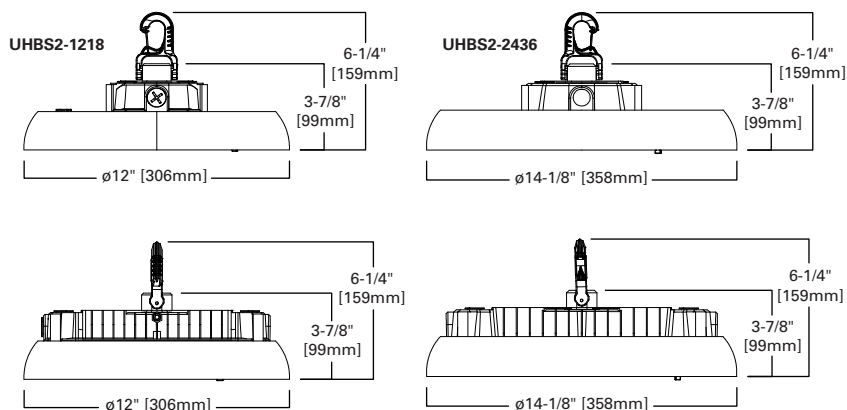

Energy and Performance Data

Default CCT / Lumen / Distribution Setting: 4000K / High Power / Wide

Catalog#	UPC	Voltage	Lumen Setting	Nominal CCT	Nominal Lumens			Wattage (120V)	Efficacy (lm/W)		
					Narrow	Medium	Wide		Narrow	Medium	Wide
UHBS2-1218-MV-L8C5-U	080083301836	120-347V	Low	3000K	11304	11445	12267	80.2	140.9	142.7	153.0
				3500K	11583	11728	12571	79.4	145.9	147.7	158.3
				4000K	11761	11908	12764	78.6	149.6	151.5	162.4
				5000K	11868	12016	12880	79	150.2	152.1	163.0
				6500K	11809	11956	12816	80.4	146.9	148.7	159.4
			Medium	3000K	13629	13799	14791	98.9	137.8	139.5	149.6
				3500K	13986	14160	15178	97.6	143.3	145.1	155.5
				4000K	14280	14459	15498	96.5	148.0	149.8	160.6
				5000K	14265	14443	15481	96.6	147.7	149.5	160.3
				6500K	14092	14268	15293	98.7	142.8	144.6	154.9
			High	3000K	16256	16459	17642	122	133.2	134.9	144.6
				3500K	16800	17009	18232	120.5	139.4	141.2	151.3
				4000K	17145	17359	18607	119.1	144.0	145.8	156.2
				5000K	17296	17511	18770	119.2	145.1	146.9	157.5
				6500K	17002	17214	18451	122.1	139.2	141.0	151.1
UHBS2-2436-MV-L8C5-U	080083301843	120-347V	Low	3000K	23839	24137	25872	156	152.8	154.7	165.8
				3500K	24695	25003	26801	154.4	159.9	161.9	173.6
				4000K	25223	25538	27374	152.8	165.1	167.1	179.1
				5000K	25575	25895	27756	153.7	166.4	168.5	180.6
				6500K	25324	25640	27483	154.2	164.2	166.3	178.2
			Medium	3000K	29445	29813	31956	194.6	151.3	153.2	164.2
				3500K	30244	30621	32823	192.4	157.2	159.2	170.6
				4000K	30998	31385	33641	190	163.1	165.2	177.1
				5000K	30989	31376	33632	191	162.2	164.3	176.1
				6500K	30334	30713	32921	195	155.6	157.5	168.8
			High	3000K	34846	35281	37818	239.4	145.6	147.4	158.0
				3500K	35898	36346	38959	235.5	152.4	154.3	165.4
				4000K	36613	37070	39735	232.1	157.7	159.7	171.2
				5000K	36861	37321	40005	233.5	157.9	159.8	171.3
				6500K	36207	36659	39295	239.1	151.4	153.3	164.3

Energy and Performance Data

Lumen Maintenance

Ambient Temperature	TM-21 Lumen Maintenance (60,000 hours)	Theoretical L70 (hours)
25°C	> 91%	> 218,000

Ambient Ratings

Lumen Package	Ambient Rating
UHBS2-1218	50C
UHBS2-2436	50C

Energy Data

Input Watts:
UHBS2-1218 = 80/100/120W
UHBS2-2436 = 150/200/240W

Shipping Data

Catalog No.	Wt.
UHBS2-1218	8 lbs.
UHBS2-2436	11.3 lbs.

IK Rating

UHBS	IK Rating
Lens	IK08
Housing	IK08

Operating Temp.	-40 to 50C
-----------------	------------

Product Specifications

Construction

- Diecast aluminum housing and heatsink for durability
- Polycarbonate lens seals LED for IP65 rating
- Impact protection rating IK08 Lens and IK08 Housing

Electrical

- Long-life LED system with electronic driver for optimal performance
- Selectable power switch for 3 levels of lumen output per model
- Selectable color switch provides 3000, 3500, 4000, 5000, and 6500K CCT at CRI >82
- Multi-volt 120 through 347V operation
- 0-10V dimming, 10% standard
- 10ft (86") long power and dimming cords provided for easier installation
- Integral 6kV surge protection level per ANSI C82.77-5-2015
- Operating temperature of -40°C to 50°C
- Default CCT/Lumen setting is 4000K and High Power

Optics

- Field adjustable distribution provides Narrow, Medium, or Wide distribution
- Default distribution is set at Wide distribution
- Accessory Refractors are not rated for high impact applications

Mounting

- EasyMount allows for either hook or pipe (stem) installations
- EasyMount hook can flip up for fast retrofit installs. Safety latch included
- Standard 3/4" NPS thread included for pendant/stem mount
- 3/4" threaded pipe, hook or ring provided by others
- Accessory Refractors are not rated for high impact applications

Compliance

- cULus listed for wet location
- NEMA 4X, IP65 rated
- NSF/ANSI standard 2 - Light fixture for Splash Zone and Non-Food Zone rated luminaire models.
- IESNA LM-79 and LM-80 standards compliant
- Qualifies as State of California Title 24 non-residential high efficiency luminaire
- FCC part 15 class A compliant
- DesignLights Consortium® Qualified and classified for DLC Premium, refer to www.designlights.org for details.

Sensor

- Plug and play low-voltage sensor accessory available
- Sensor installs directly to integral fixture port
- PIR motion sensor with 0-10V control
- Wet location and IP65 rated
- Up to 50ft mounting height
- Sensor remote control must be ordered separately

Emergency Pack Option

- 120-347V universal input remote emergency driver accessory available
- Field installed EM driver wires directly to fixture
- 90-minute batteries provide constant power to the LED system
- Test switch/indicator button can be tested safely from the ground using remote control
- EM remote control included with accessory
- Accessory comes with grommets and mounting hardware, see EM driver spec sheet.

Finish

- White polyester powder coat finish painted after fabrication

Warranty

- Five year limited warranty

Accessories List

Catalog Number	Description	Unit Carton UPC
UHBS-SMB	UHBS Surf Mnt Brkt for 12"/14" Model	080083273263
UHBS-WG13 ^{(1), (3)}	UHBS Wire Guard	080083273348
EBP-RM40R ⁽²⁾	40W Emergency Driver, Remote Mount 120-347V White w/ remote included	080083259496
UHBS-SENSOR PK ⁽²⁾	PIR Sensor 360 Lens 60FT MH Kit	080083257898
UHBS SENSOR REMOTE	UHBS Sensor Remote Control	080083260249
UHBS-ALR13 ⁽³⁾	UHBS Aluminum Reflector	080083273324
UHBS-CLR13 ⁽³⁾	UHBS 13 Clear PC Reflector	080083273300
UHBS2-ADR13-U	Adapter Ring used for attaching WG13, CLR13 or ALR13 to the UHBS2-1218 luminaire	080083310715
UHBS-SC7 ⁽⁴⁾	UHBS Safety Cable 7FT long with Clip	080083259854

Notes: (1) Installs directly to fixture and cannot be used in conjunction with refractors. (2) To meet state and local codes, EBP cannot be used with UHBS with sensor or with UHBS sensor accessory. (3) Adapter ring required to attach UHBS-ALR13, UHBS-CLR13 and UHBS-WG13 to the UHBS2-1218 luminaire. Must order Adapter ring to fit UHBS2-1218 model. (4) The Safety Cable accessory shall be utilized only as a secondary safety and not the primary means of mounting.



WG
Wireguard



EBP-RM40R ⁽²⁾
Field installed Remote EM




SENSOR ⁽²⁾
Plug in sensor EM



ALR
Aluminum Reflector



CLR
Clear Reflector



UHBS2-ADR13-U
Adapter Ring

Refractors


Catalog Number	Description	Unit Carton UPC
UHBS2-CLR3-12	Clear 3 in deep refractor for 1218 lumen fixture	080083396771
UHBS2-CLR3-14	Clear 3 in deep refractor for 2436 lumen fixture	080083396788
UHBS2-CLR6-12	Clear 6 in deep refractor for 1218 lumen fixture	080083396795
UHBS2-CLR6-14	Clear 6 in deep refractor for 2436 lumen fixture	080083396801
UHBS2-FRR3-12	Frosted 3 in deep refractor for 1218 lumen fixture	080083396818
UHBS2-FRR3-14	Frosted 3 in deep refractor for 2436 lumen fixture	080083396825
UHBS2-FRR6-12	Frosted 6 in deep refractor for 1218 lumen fixture	080083396832
UHBS2-FRR6-14	Frosted 6 in deep refractor for 2436 lumen fixture	080083396849



UHBS2-CLR3-XX
Clear Deep Refractor





UHBS2-FRR3-XX
Frosted Deep Refractor






UHBS2-CLR6-XX
Clear Deep Refractor



UHBS2-FRR6-XX
Frosted Deep Refractor

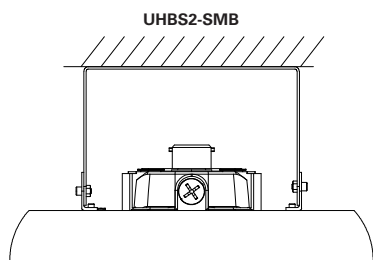

Photometric Data

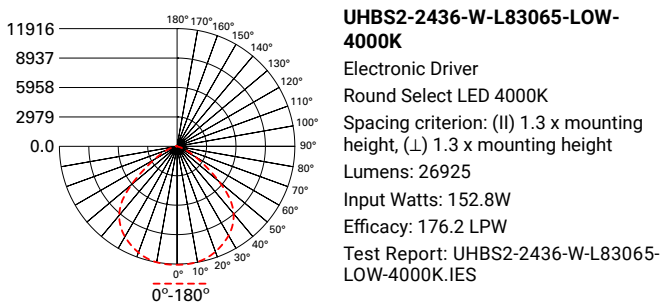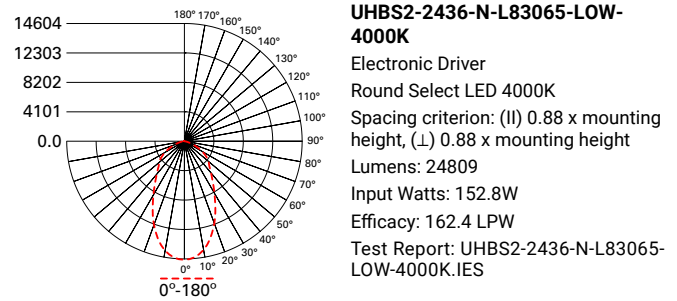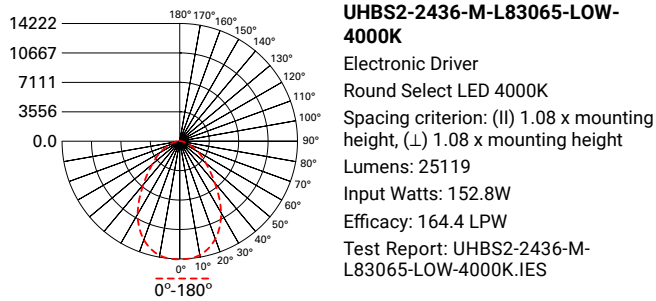 View IES files


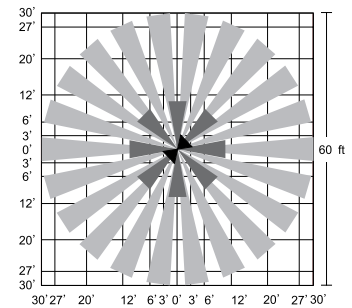
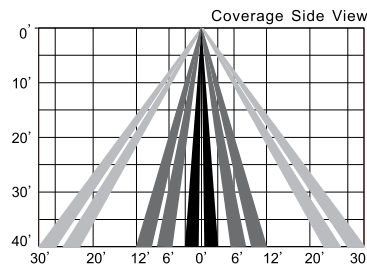
Sensor Coverage UHBS-Sensor

Sensor Specifications

Power supply	12V-24V DC, >30mA
Dim control output	0-10V, max. 25mA sinking current
Remote range	50ft. (15m) indoor, no backlight
Dim control output	0-10V
Detection radius	20% / 50% / 75% / 100% (1-8m)
Mounting height	Up to 50ft (15.25 m)
Time setting	10s / 1 min / 5 min / 10 min / 15 min / 20 min / 30 min / 60 min
Light-control	24H / 10 LUX / 30 LUX / 50 LUX
Sensor Operating Temp.	-40°F ~+ 158°F (-40°C ~+ 70°C)
IP rating	IP65

Notes: Warm up time 40 sec after sensor first receives input power. Fixture will stay on 40 seconds then work move to default mode.

Any setting changed by sensor remote control (order remote separately), will led lights on remote to turn on and off to confirm. See sensor instruction sheet on UHBS product page found on www.cooperlighting.com



Sensor Modes

	Brightness	Sensitivity	Hold Time	Daylight Sensor	Stand-by Dim	Stand-by Period
MODE 1 (Default)	100%	75%	5 min	Disabled	30%	30 min
MODE 2	100%	75%	1 min	Disabled	30%	∞
MODE 3	100%	75%	5 min	30LUX	30%	30 min
MODE 4	100%	75%	1 min	(30LUX/300LUX)	30%	∞